



Ice Bath Tub

Cold water therapy helps lower core and skin temperature while increasing heat storage capacity and reducing tissue inflammation during training. When exposed to cold water, blood vessels constrict rapidly—a natural protective response. Upon exiting, they dilate, enhancing circulation. This alternating process strengthens cardiovascular health and helps prevent conditions like hypertension and arteriosclerosis.



KKONBEST

Professional Hot Cold Therapy Expert



Model IB01

Color	Black / White
Size	D100 * H95cm
Thickness	10 cm
Capacity	≈402L




Model IB02

Color	Black / White
Size	L150*W80*H65cm L170*W80*H65cm
Thickness	10 cm
Capacity	≈390L / ≈ 450L



Model IB03

Color	Black
Size	D200 * H65 cm
Thickness	10 cm
Capacity	≈1500L

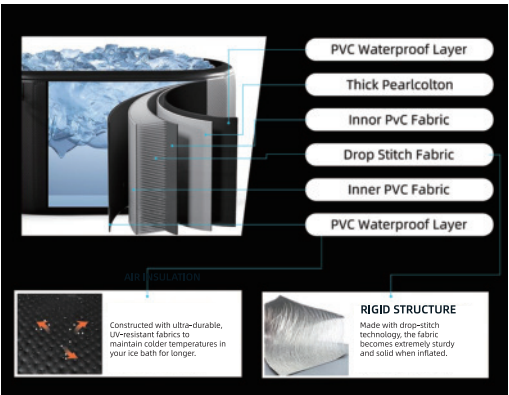

Focus on Sports Recovery Since 2009

TIANJIN KONBEST TECHNOLOGY CO., LTD

天津康伴科技有限公司
TIANJIN KONBEST TECHNOLOGY CO., LTD
广州益尔康医疗科技有限公司
GUANGZHOU ERCON MEDICAL TECH CO.,LTD

+86 15822690619

sales@tjkonbest.com

https://tjkonbest.com



WhatsApp

Office Address: No.8 of Huatian Road,
Huayuan Industry Area,THT,Tianjin,China,300384.

Factory Address: 4th Floor, Hengtong Building, No. 20,
Huashan Road, Panyu District,
Guangzhou City, Guangdong Province

Model **CB01**

Ice Bath Chiller



Model **CB02**

Ice Bath Chiller



Model	Power Supply	Input Power	Compressor Power	Cooling Capacity	Lowest Temperature	Highest Temperature	Refrigerant	Ozone	Fan	Circulation Pump
1HP	50-60HZ/ Voltage 1150W	110V/220V/240V	950W	2500-2800W	3°C	40°C	R410a	Yes/5W	Built In 300W	Built In 88W
1.5HP	50-60HZ/ Voltage 1300W	110V/220V/240V	1100W	3600-3800W	3°C	40°C	R410a	Yes/5W	Built In 300W	Built In 88W
2HP	50-60HZ/ Voltage 1480W	220V	1300W	5200W	3°C	40°C	R410a	Yes/5W	Built In 300W/128W	Built In 88W
Model	Water Filter	Noise Monitoring	Hosing Set	Safety Fuse	Product Weight	Product Dismension	Cooling Time	Heating Time	Note	
1HP	Built In/ Φ11X28CM	50-65dBa	2 PCS.1/2INCH/ 150CM Length	Built In/8A	40KG	51.5X35X53CM	250L≤4-5H	250L≤6-6H	Customization can be made according to customer	
1.5HP	Built In/ Φ11X28CM	50-65dBa	2 PCS.1/2INCH/ 150CM Length	Built In/8A	43KG	53X36X55CM	250L≤3-4H	250L≤4-5H		
2HP	Built In/ Φ11X28CM	50-65dBa	2 PCS.1/2INCH/ 150CM Length	Built In/8A	48KG	55X39X59CM	250L≤2-3H	250L≤3-4H		